

Express Mail Label No.: EV544538707US

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number
WO 2004/011997 A1

(51) International Patent Classification⁷: G02F 1/13357,
1/1335

(21) International Application Number:
PCT/KR2003/000349

(22) International Filing Date: 20 February 2003 (20.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2002-0044272 26 July 2002 (26.07.2002) KR

(71) Applicant (for all designated States except US): SAM-
SUNG ELECTRONICS CO., LTD. [KR/KR]; 416,
Maetan-dong, Paldal-gu, Suwon-si, Gyeonggi-do 442-742
(KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PARK, Jong-Dae
[KR/KR]; #474-301 Changcheon-dong, Seodaemun-gu,
Seoul 120-836 (KR). CHANG, Se-In [KR/KR]; 2-1210

Dongnam APT., #810-2 Maetan4-dong, Paldal-gu, Su-
won-si, Gyeonggi-do 442-716 (KR). CHA, Guy-Ho
[KR/KR]; 102-306 Sinmiju APT., #201-2 Byeongjeom-ri,
Taeon-eup, Hwaseong-gun, Gyeonggi-do 445-974 (KR).
LEE, Seok-Won [KR/KR]; 523-1405, Jinsanmaeulsam-
sung5cha APT., #1167, Pungdeokcheon-ri, Suji-eup,
Yongin-si, Gyeonggi-do 449-846 (KR).


(74) Agent: PARK, Young-Woo; 5F., Seil Building, #727-13,
Yoksam-dong, Gangnam-gu, Seoul 135-921 (KR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: BACKLIGHT ASSEMBLY USING THE SAME AND LIQUID CRYSTAL DISPLAY DEVICE

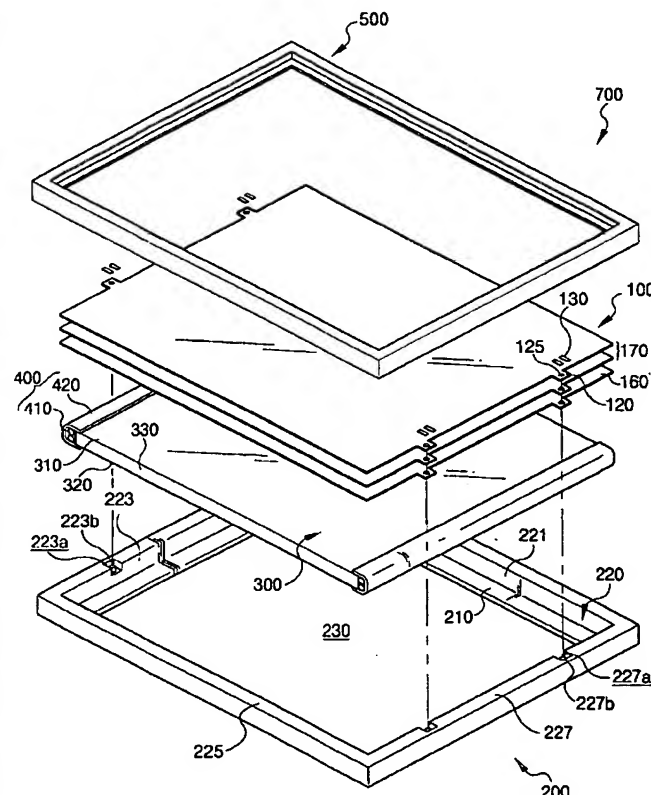

(57) Abstract: There are provided a backlight assembly
(700) and an LCD device (1000) using the same. The back-
light assembly (700) has an optical sheet (100) for improv-
ing light efficiency and optical properties thereof and an
elastic adhesive member (130) disposed on the optical sheet
(100). When the optical sheet (100) deforms with heat, the
elastic adhesive member (130) may be expanded or con-
tracted corresponding to deformation of the optical sheet
(100) and absorb impact applied to LCD device. Accord-
ingly, the backlight assembly (700) may prevent the opti-
cal sheet (100) from being wrinkled or scratched, thereby
preventing display quality of the LCD device from being
deteriorated.

WO 2004/011997 A1